



Submittal Data Sheet: WMMS-24K-V2B(58)2

INDOOR UNIT



WMMS-24E-V2B(58)2

OUTDOOR UNIT



WMMS-24C-V2B(58)2

ACCESSORIES

- ADVANCED HEALTHY KIT
HEPA/Enzyme/Cold Catalyst Filter
Anion Generator
- THERMOSTAT
- MOUNTING BRACKETS
- FOOT RISERS
- COPPER/WIRE/ACC.SET
- LINESET COVERS
- WINTER WIND BAFFLE
- BRIDGE CONTROLLER

Connection Pipes		
Outer Diameter Liquid Pipe	inches	1/4
Outer Diameter Gas Pipe	inches	5/8
Max Distance ID Above ODU	feet	50
Max Distance ID Below ODU	feet	60
Max Distance Length	feet	100

Dimensions & Weight Indoor Unit		
Dimensions-Net W x H x D	inches	39.7 x 12.4 x 8.6
Gross / Net Weight	lbs.	46.3 / 35.3

Dimensions & Weight Outdoor Unit		
Dimensions-Net W x H x D	inches	36.2 x 31.1 x 14.6
Gross / Net Weight	lbs.	132 / 119
Safety Certification		ETL (C & US)
Performance Certification		AHRI

Job Name:		Tag #:	
Location		Date:	
General Contractor:		Mechanical Contractor:	
Sales Representative:		Sales Engineer:	
Submitted by:		Drawing #:	
Reference		PO #:	

YMGI's ductless Wall Mount Mini Split (WMMS) is designed for high performance, easy installation and servicing. The single-zone WMMS system consists of 1 wall-mounted indoor unit and 1 outdoor unit. The outdoor unit is designed for horizontal venting, making condenser installation in tight areas simple. Ideal for multi-family and high-rise buildings in residential, commercial, institutional, and industrial applications. Includes U-Touch remote control.

		COOLING	HEATING
System Model		WMMS-24K-V2B(58)2	
Power Source		208-230 / 1 / 60	
Nominal Capacity	Btu/h	21300	23000
Frequency (High / Medium / Low)	Hz	100 / 60 / 15	
Power Input (High / Medium / Low)	W	2650 / 1700 / 400	2750 / 1790 / 500
Rated Current (High / Medium)	A	12.7 / 8.2	13.2 / 8.6
SEER / HSPF	Btu/h.w	18.0	10.2
EER	Btu/h.w	12	
Dehumidifying Volume	Pints/Hr.	5.5	





Outdoor Unit (ODU)		
Model Number		WMMS-24C-V2B(58)2
Compressor Type		Twin Rotary DC
L.R.A.	A	41
Compressor RLA	A	8.4
Compressor Power Input	W	1640
Overload Protector		1NT11L-3979
Throttling Method		Electronic Expansion Valve
Fuse Circuit Breaker of HVAC Type	A	30
Starting Method		Transducer starting
Recommended Working Ambient Temp Range	°F	15°F ≤ T ≤ 115 °F 5°F ≤ T ≤ 86 °F
Condenser Coil Type		Aluminum fin-copper tube
Fan Motor Speed (rpm) (H/L)		780 / 500
Output of Fan Motor	W	90
Fan Motor RLA	A	0.90
Fan Motor Capacitor	uF	4
Air Flow Volume of Outdoor Unit	CFM	2480
Defrosting Type		Auto defrost
Designed for Climate Type		T1
Isolation		I
Moisture Protection		IP24
MAX. Operating Pressure for Discharge Side	PSIG	551
MAX. Operating Pressure for Suction Side	PSIG	174
Sound Pressure Level (H/M/L)	dBA	56
Sound Power Level dB (H/M/L)	dBA	66

Indoor Unit (IDU)		
Model Number		WMMS-24E-V2B(58)2
Fan Motor Speed (SH/H/M/L)	RPM	1400 / 1150 / 1100 / 850 1400 / 1150 / 1100 / 900
Air Flow Volume (SH/H/M/L)	CFM	560 / 471 / 412 / 353
Fan Motor		FN60B-ZL
Output of Fan Motor	w	35
Fan Motor RLA	A	0.45
Evaporator Coil Type		Aluminum fin-copper tube
Coil-Copper Pipe Diameter	inches	0.28
Row-FPI		2-16.9
Output of Swing Motor	W	2.5
Fuse	A	PCB 3.15A Transformer 0.2A
Sound Pressure Level (SH/H/M/L)	dBA	48 / 44 / 40 / 35
Sound Power Level (SH/H/M/L)	dBA	58 / 54 / 50 / 45



OUTDOOR UNIT


Dimensions (inches)	
W	36 3/16"
W1	39 13/32"
W2	24"
H	31 3/32"
D	14 19/32"
D1	16 13/16"
D2	15 11/16"

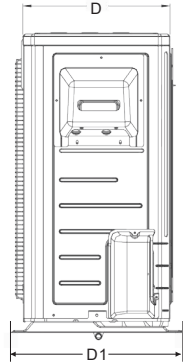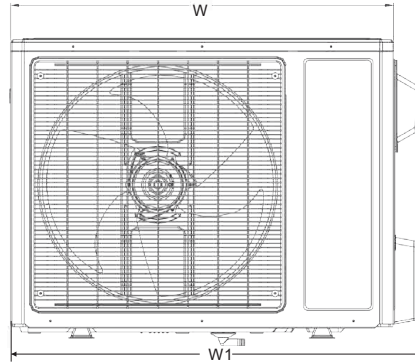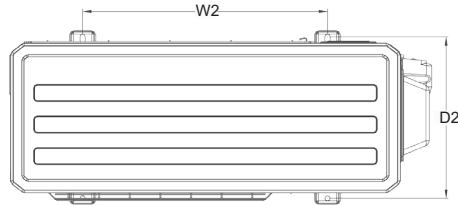


INDOOR UNIT

Dimensions (inches)	
W	39 11/16"
H	12 13/32"
D	8 19/32"


(Top view)




(Front view)

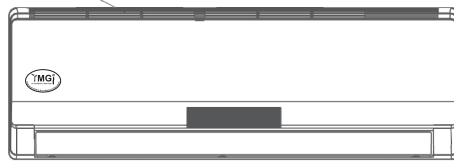

(Bottom view)

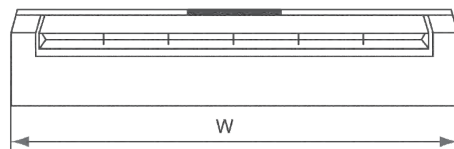


(Left view)




Tube exit option-left

(Right view)




Tube exit option-right

MOUNTING PLATE

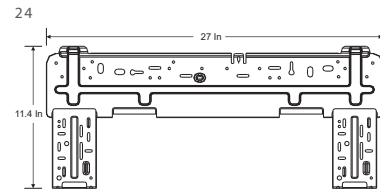

TERMINAL BLOCK

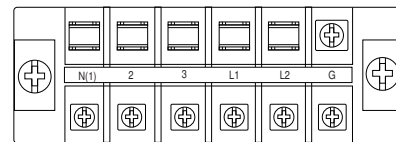

FEATURES

- 208-230/1/60 power input
- Quiet and efficient heating & cooling.
- LED display shows set temperature & operating modes.
- Motorized louver system quietly distributes air evenly
- "U-TOUCH" Remote Control.
- DC Inverter technology
- Wide working ambient temperature ranges
- Stylish design
- Compact outdoor unit with side discharge
- Outdoor unit ships pre-charged.
- World-class quality compressors
- Durable powder coated cabinet
- Default flare brass connection valves
- Knock-outs for refrigerant pipes and wires
- Built to ETL/UL/CSA/ARI standards
- Easy installation and maintenance

YMGI Group

601 Arrow Ln, O'Fallon, Missouri 63366

Phone: 1-866-833-3138

Fax: 1-866-377-3355

ymgigroup.com

Sales Representative or Distributor: