



Submittal Data Sheet: PTHP-15K-14B(45)

UNIT



PTHP-15K-14B(45)

ACCESSORIES

(Each Sold Separately)

- WALL SLEEVE
- STAMPED GRILLE
- ARCHITECTURAL GRILLE
- SUB BASE
- THERMOSTAT
- WIRELESS CONTROL
- MOTION CONTROL

Dimensions & Weight Indoor Unit		
Dimensions of Main Unit W x H x D	In.	42 x 16.0 x 21.5
Dimensions of Wall Sleeve W x H x D	In.	42 x 16 x 13.75"
Weight-Net	lbs.	119.0
Weight-Gross	lbs.	143.3
R410A Refrigerant Charge	lbs.	2.38

Job Name:		Tag #:	
Location		Date:	
Engineer:		Approval:	
Submitted to:		Unit #:	
Submitted by:		Drawing #:	
Reference		PO #:	

The HARMONY STANDARD features touch pad controls, a digital display, that provides precise climate control, so your guests can customize their comfort level. Two efficient direct-drive motors power an outdoor condensing cool fan, and a 3 speed cross-flow random pitch indoor blower engineered to deliver cooling and heating evenly throughout any room.

Models 208-230 / 1 / 60		PTHP-15K-14B(45)	
Cooling Capacity (Rated)	Btu/h	14600 / 15000	
Heating Capacity (Rated)	Btu/h	13800 / 13600	
Cooling Power Input	W	1510 / 1530	
Heating Power Input	W	1390 / 1370	
Cooling Power Current	Amp	7.5 / 6.7	
Heating Power Current	Amp	6.0 / 6.6	
Rated Input (Without/With Ele. Heater)	W	2025 / 5000	
Rated Current (Without/With Ele. Heater)	Amp	11.03 / 24.0 - 21.7	
Rated Ele. Heater	KW	5	
MCA	Amp	28.5	
Recommended Circuit Breaker HVAC	Amp	30	
Air Flow Rate (H/M/L)	CFM	350 / 320 / 300	
Fresh Air Ventilation	CFM	up to 60	
Dehumidifying Volume	Pints/day	76.0816	
EER	Btu/h.w	9.7 / 9.8	
COP	WW	2.9 / 2.9	
Reference Only-Good for Floor Space, of Mild Load, in Residential Applications	Sq. Ft	210-310	
Isolation		I	
Moisture Protection		IP24	
Allowed Maximum Operation Pressure-High Side	PSI	550	
Allowed Maximum Operation Pressure-Low Side	PSI	290	
Fan Type		Cross-flow	
Fan Wheel Dia. x Length	In.	4.8 x 27.8	
Fan Motor Speed(H/ML)	RPM	1100 / 1000 / 920	
Output of Fan Motor	W	23	
Fan Motor RLA	Amp	0.36	
Fan Motor Capacitor	UF	1	
Input of Heater	W	4087 / 5000	
Evaporator Form		Aluminum Fin-Copper Tube	
Pipe Diameter	In.	9/32	
Row-FPI		3x 18	
Coil Length (WxHxD)	In.	27.5 x 9.53 x 1.5	
Fuse	Amp	3.15	
Sound Pressure Level (H/M/L)	dB (A)	53 / 52 / 51	
Sound Power Level (H/M/L)-	dB (A)	63 / 62 / 61	
Compressor Type		Rotary	
L.R.A.	Amp	32.6	
Compressor RLA	Amp	6.6	
Compressor Power Input	W	1480	
Overload Protector		B205-150-141C	
Metering Device		Capillary	
Panel Continued	°F	61 - 86	
Outdoor Ambient Temp (Cooling)	°F	55 - 115	
Outdoor Ambient Temp (Heating)	°F	≤75	
Condenser		Aluminum Fin-Copper Tube	
Form Pipe Diameter	In.	5/16	
Rows-FPI		3x 18	
Coil Length (W x H x D)	In.	25.0 x 13.9 x 0.9	
Fan Motor Speed	RPM	1370	
Output of Fan Motor		65	
Fan Motor RLA	Amp	0.77	
Fan Motor Capacitor	UF	2.5	
Fan Type		Axial-flow	
Fan Diameter	In.	13.75	
Sound Pressure Level (H/M/L)	dB (A)	63 / 61 / 59	
Sound Power Level (H/M/L)	dB (A)	73 / 71 / 59	





Submission Data Sheet: PTHP-15K-14B(45)

UNIT

Dimensions (inches)	
W	42"
H	16"
D	21 1/2"

SLEEVE

Dimensions (inches)	
SW	42"
SH	16"
SD	13 3/4"

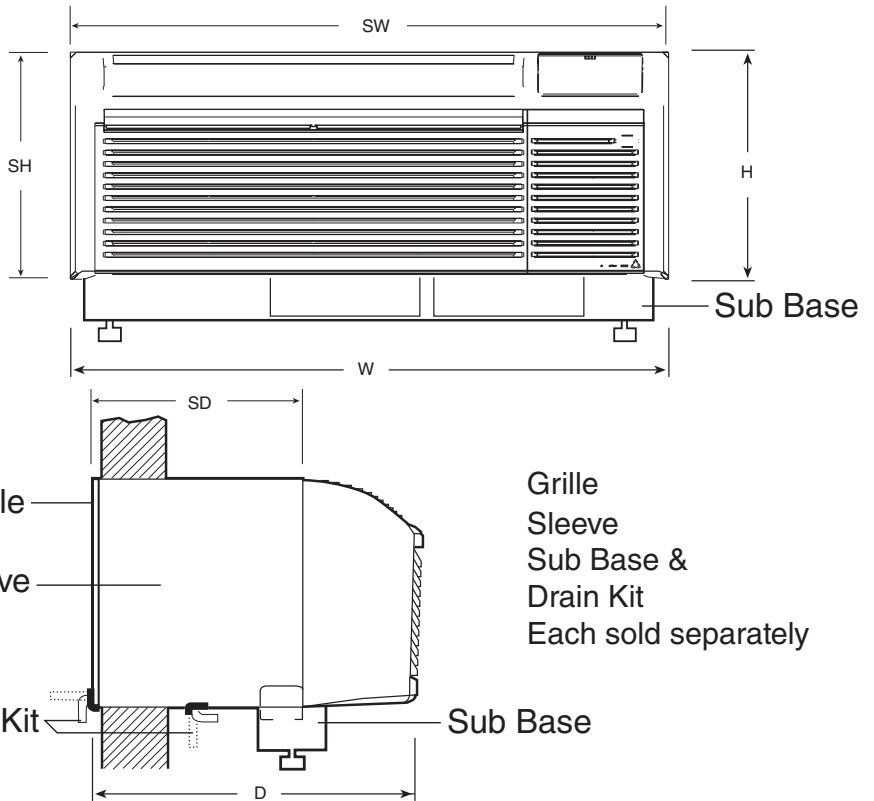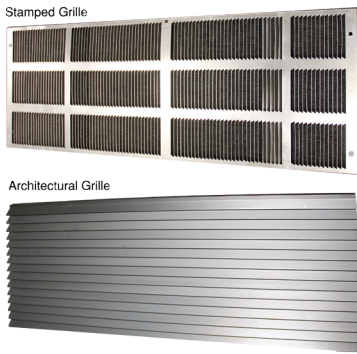

FEATURES

- 208-230 / 1 / 60 power input
- 30 Amp LCDI Cord
- Quiet and efficient heating & cooling.
- Tactile Display shows set temperature & operating modes.
- Two motors quietly and powerfully distribute air evenly.
- Fresh Air damper allows selection of air source
- Dip Switches for easy configuration
- Preheating coil prevents cold air blowing at start up.
- Wide working ambient temperature ranges
- Fan blade design aides in evaporating condensate
- Stylish Design
- Impact resistant ABS cover
- Steel Frame with Powder Coated Components
- Fits a Standard PTAC Opening
- Built to UL/CSA/AHRI standards
- Easy installation and maintenance



Touch Pad Control with Digital Display




Main Control Board



Washable and Reusable Particulate Air Filter



Condensate Anti-freeze Drainage Valve



Energy Management & Thermostat Connections

YMGI Group

601 Arrow Ln, O'Fallon, Missouri 63366
 Phone: 1-866-833-3138
 Fax: 1-866-377-3355
 ymgigroup.com

Sales Representative or Distributor: