



Submittal Data Sheet: WMMS-09KS-V24(86)8

SYSTEM



WMMS-09KS-V24(86)8

ACCESSORIES

- MOUNTING BRACKETS
- FOOT RISERS
- COPPER/WIRE/ACC.SET
- LINESET COVERS
- WINTER WIND BAFFLE

Model No.		WMMS-09KS-V24(86)8	
<b>Connection Pipes</b>			
Outer Diameter Liquid Pipe	in.	1/4"	
Outer Diameter Gas Pipe	in.	3/8"	
<b>Dimensions</b>			
Indoor Unit	Shipping	in.	30 5/8" x 9 3/4" x 7 11/16"
	NET	in.	33" x 12.8" x 10.4"
Outdoor Unit	Shipping	in.	30" x 21" x 10 1/8"
	NET	in.	35.83" x 24" x 14.57"
Solar Panel	Shipping	in.	42.28" x 31.5" x 6.5"
	NET	in.	47.25" x 34.65" x 8"
Battery	Shipping	in.	25.4" x 9.65" x 19.5"
	NET	in.	15.95" x 6.9" x 9.25"
<b>Weight</b>			
Indoor Unit	Net/Gross	lbs.	15lbs 20oz / 20lbs 3oz
Outdoor Unit	Net/Gross	lbs.	88.2 /99.2
Solar Panel	Net/Gross	lbs.	60/62
Battery	Net/Gross	lbs.	44.1 / 57.3

Job Name:		Tag #:	
Location		Date:	
General Contractor:		Mechanical Contractor:	
Sales Representative:		Sales Engineer:	
Submitted by:		Drawing #:	
Reference		PO #:	

The (86) Series All DC Mini Split Heat Pump lets you cool your home or office during the day for just pennies or even free. Designed to run completely off of solar power, it can be supplemented with grid power, when solar power can't provide all of the energy needed to run the system. When powered by batteries, it can run up to 8 hours, to keep you cool in the evening. Attached to municipal power supply, the 22 SEER high efficiency system will save money while keeping you comfortable, even when the sun isn't shining. With solar power, the (86) Series Solar system can produce a SEER rating of up to 38.



Model No.		WMMS-09KS-V24(86)8	
Outdoor Unit		WMMS-09CS-V24(86)8	
Indoor Unit		WMMS-09ES-V24(86)8	
Power Supply		24VDC (21V to 27V)	
Input Power	V	DC 24	
IDU Current/Watts	A / W	0.80A/19.2W	
<b>Performance</b>			
Rated Capacity	Cooling	Btu/h	9000
		W	2600
	Heating	Btu/h	10000
		W	2850
Noise	Indoor	dB(A)	≤40
	Outdoor	dB(A)	≤52
Air Circulation		cfm	265
Suitable Area		ft²	86.1~161.5
EER	W/W		4.56
	Btu/h/w		15.5
Batteries		12 VDC x 2	
Battery AH(each)		AH	60 x 2
Solar panel specification		12V/150W x 4	
Refrigerant		R-134a	
<b>Suggested Ambient Temperature Ranges:</b>			
Cooling (capacities drop/discharge temperatures rise as ambient temperatures rise)		°F	35°F to 110°F
Heating (capacities/discharge temperatures drop as ambient temperatures go down)		°F	35°F to 60°F
<b>Power Consumption</b>			
Power Input		W	500
Input Power		V	DC24
Rated Current		A	20
Minimum Circuit Amperage		A	25
Maximum HVAC Circuit Breaker		A	30



# Submittal Data Sheet: WMMS-09KS-V24(86)8


## OUTDOOR UNIT

Dimensions (inches)	
W	30"
H	21"
D	10 1/8"
W2	21 1/4"
D2	11 3/8"

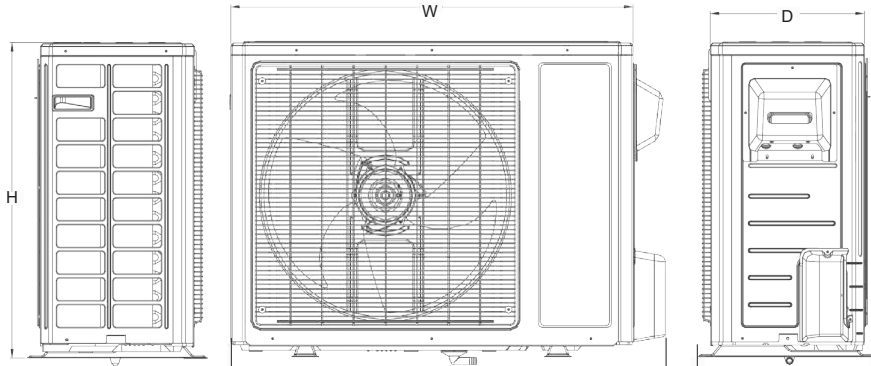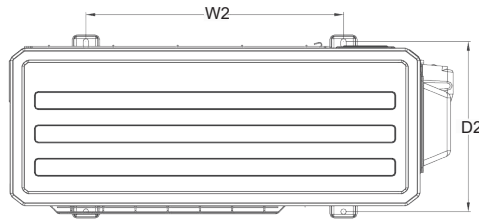


## SOLAR PANEL

Dimensions (inches)	
L	42.28"
W	31.5"
D	6.5"

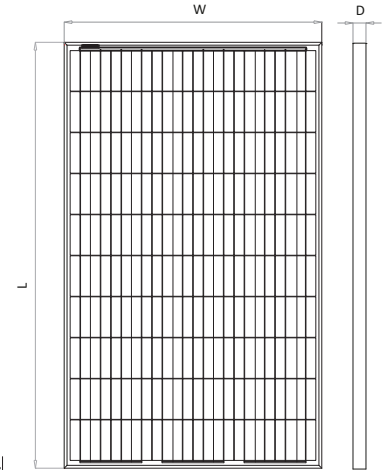


## INDOOR UNIT


Dimensions (inches)	
W	30 5/8"
H	9 3/4"
D	7 11/16"

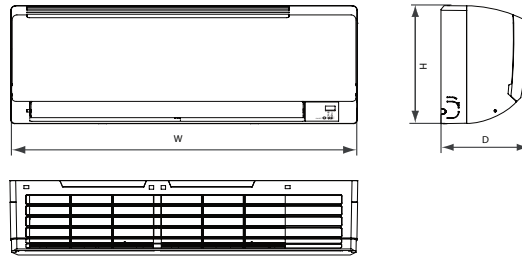

## TERMINAL BLOCK

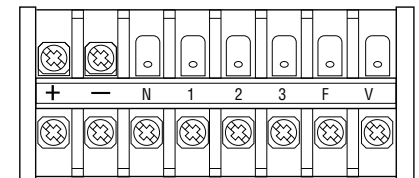

## MOUNTING PLATE

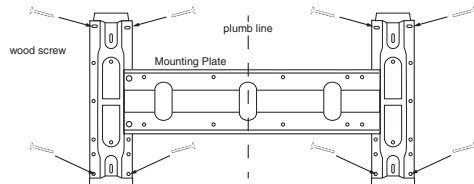

## FEATURES

- PV panel DC power. Can optionally be supplemented by municipal power. (AC to DC converter is required for alternate power source.)
- Can be run off of batteries for up to 8 hours.
- Environmentally friendly R-134a refrigerant.
- Constructed from environment friendly materials.
- Solar panel installations eligible for Federal tax credit and/or State and/or utility company's rebate/incentive programs
- Quiet and efficient heating & cooling
- LED display shows set temperature
- Motorized louver system quietly distributes air evenly
- Remote Control
- DC Inverter technology
- Wide working ambient temperature ranges
- Stylish system design
- Compact outdoor unit with side discharge
- Outdoor unit ships pre-charged.
- High quality compressors
- Durable powder coated cabinet
- Default flare brass connection valves
- Knock-outs for refrigerant pipes and wiring
- Built to UL standards
- Easy installation and maintenance

**YMGI Group**  
 601 Arrow Ln, O'Fallon, Missouri 63366  
 Phone: 1-866-833-3138  
 Fax: 1-866-377-3355  
 ymgigroup.com

Sales Representative or Distributor: