



Submittal Data Sheet: VRFO-216VP-V2C(55)5 (3 x VRFO-72VP-V2C(55)5)

OUTDOOR UNIT

Standard VRF
Heat Pump -4 °F



VRFO-216VP-V2C(55)5
3 x VRFO-72VP-V2C(55)5

ACCESSORIES

- COPPER/WIRE/ACC.SET
- LINESET COVERS
- WIND BAFFLE
- DISCHARGE HOOD

Connection Pipes		
Outer Diameter GasPipe	inches	1 x 7/8, 1 x 1 1/8
Outer Diameter Liquid Pipe	inches	1 x 3/8, 1 x 1/2
Modular		3
Max. Equivalent Connection Pipe Length	ft.	540
Max. Height ODU at upper side	ft.	164
Max. Height ODU at lower side	ft.	295.25

Dimensions & Weight Outdoor Units		
Dimensions of Unit (W x H x D)	inches	3 - 36 5/8 x 63 1/4 x 30 1/8
Net Weight	lbs	3 x 496

Job Name:		Tag #:	
Location		Date:	
General Contractor:		Mechanical Contractor:	
Sales Representative:		Sales Engineer:	
Submitted by:		Drawing #:	
Reference		PO #:	

A VRF SYSTEM THAT STANDS ALONE


YMGI's UltraHeating VRF systems are designed to deliver comfort year round. Effective in a wide range of outdoor ambient temperatures (as low as -22° F), the YMGI UltraHeating VRF systems can meet all your heating and cooling needs, with no need for a supplemental heating system. A YMGI VRF system can replace traditionally designed gas furnace and AC/HP coil & outdoor unit systems., and save money on installation and operation.

Model	Unit	VRFO-216VP-V2C(55)5
Cooling Capacity	Btu/h	3 x 69,000 = 207,000
Heating Capacity	Btu/h	3 x 77,000 = 231,000
Air flow volume	CFM	3 x 6700
ESP	WC	3 x 0.33"
Heating Capacities at Different OD Ambient Temperatures	47 ° F	100% / 3 x 81,000
	17 ° F	100% / 3 x 81,000
	-4 ° F	100% / 3 x 81,000
	-22 ° F	80% / 3 x 64,800
EER Ducted / Non-Ducted		10.80 / 11.00
IEER Ducted / Non-Ducted		21.60 / 24.70
COP 47 Ducted / Non-Ducted		3.25 / 3.52
COP 17 Ducted / Non-Ducted		2.23 / 2.25
Sound Pressure/ Power Level	dB	61/71
Power Supply	V/Ø/Hz	3 x 208~230/3/60
MCA	A	3 x 45
MOP/HVAC Circuit Breaker	A	3 x 70
Connection Method and Valve Sizes	-	Brazing (3/8+7/8") (1/2+1 1/8")
R410A Refrigerant Factory Charge	oz	3 x 236
Compressor Manufacturer	-	Hitachi
Compressor Type	-	Inverter Scroll Hermetic
Compressor Quantity	No.	3 x 1
Motor Type	-	Permanent Magnet Synchronous Motor
Fan Quantity/Type	-	3 x Axial
Capacity Adjustment Range	%~%	12%~120%
Maximum No. of drive IDU	units	3 x 16
IDU Capacity Total	% ODU	50-150% zoning
Condenser Fin Color	-	Gold
Cooling Operation Ambient Temperature Range	° F	23° ~ 126°
Heating Operation Ambient Temperature Range	° F	-4° ~75°
Base Pan Heater	-	YES




OUTDOOR UNIT


Dimensions	
	inches
A	52 3/4"
B	30 1/8"
C	63 1/4"
D	28 3/4"
E	39 1/4"

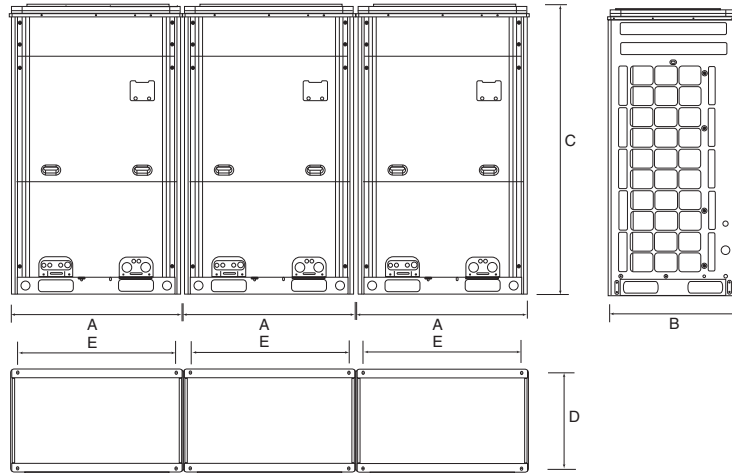


SYSTEM LAYOUT

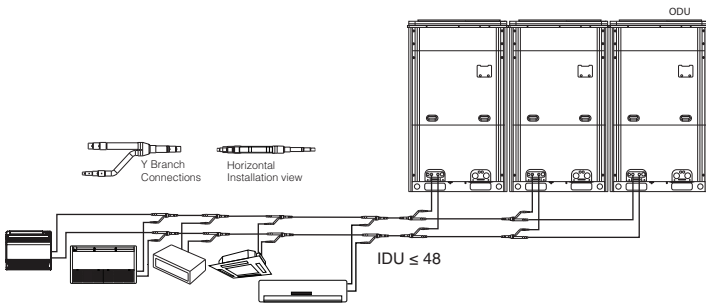


CLEARANCES

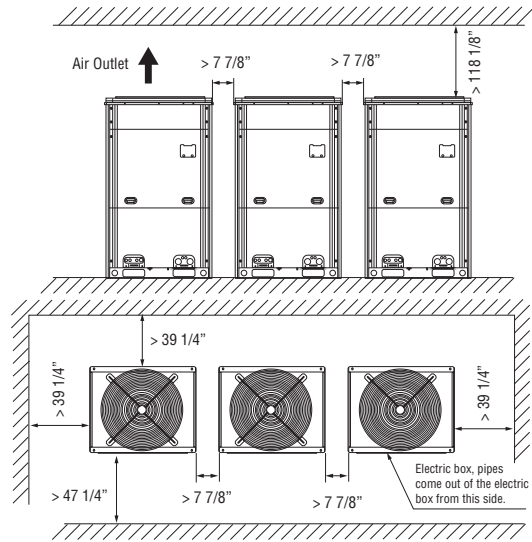

TERMINAL BLOCKS
In Each VRFO



208/230/3/60



IDU/ODU Communication D1 D2
Wired Controller H1 H2

Total length (actual length) of fitting pipe	
Length of farthest fitting pipe	Actual length
	Equivalent length
From the 1st branch to the farthest indoor pipe	
Height difference between ODU and IDU	ODU at upper side
	ODU at lower side
Height difference between IDUs	

Modular VRF Systems		
Allowable value		
	m	f
Total length (actual length) of fitting pipe	≤1000	3280-3/4
Length of farthest fitting pipe	≤165	541 1/4
From the 1st branch to the farthest indoor pipe	≤190	623 1/4
Height difference between ODU and IDU (ODU at upper side)	≤40	131 1/4
Height difference between ODU and IDU (ODU at lower side)	≤90	295 1/4
Height difference between IDUs	≤30	98 1/2

FEATURES

- 208-230/3/60 power input
- Heats at 80% capacity down to -4° F
- Quiet and efficient heating & cooling.
- Compact outdoor unit with top discharge
- ODU ships pre-charged with environmentally friendly R410A refrigerant.

- DC Inverter technology
- All DC Inverter high quality compressors
- Sensorless DC fan motor
- Durable powder coated cabinet
- Brazed refrigerant line connections
- Built to ETL/UL/CSA/AHRI standards
- Easy installation and maintenance

YMG I Group

601 Arrow Ln, O'Fallon, Missouri 63366
Phone: 1-866-833-3138
Fax: 1-866-377-3355
ymgigroup.com

Sales Representative or Distributor: