



## Submittal Data Sheet: VRFO-36HP-V2B(55)5

### OUTDOOR UNIT

VRF Heat Pump



**VRFO-36HP-V2B(55)5**

### ACCESSORIES

- MOUNTING BRACKETS
- FOOT RISERS
- COPPER/WIRE/ACC.SET
- LINESET COVERS
- WINTER WIND BAFFLE

Connection Pipes		
Outer Diameter Liquid Pipe	inches	3/8
Outer Diameter Gas Pipe	inches	5/8
Max. Equivalent Connection Pipe Length	ft.	360
Max. Height ODU at upper side	ft.	164
Max. Height ODU at lower side	ft.	131

Dimensions & Weight Outdoor Unit		
Dimensions of Unit (W x H x D)	inches	35 3/8 x 53 x 13 3/8
Net Weight	lbs	242.6

Job Name:		Tag #:	
Location		Date:	
General Contractor:		Mechanical Contractor:	
Sales Representative:		Sales Engineer:	
Submitted by:		Drawing #:	
Reference		PO #:	

#### A FLEXIBLE AND AFFORDABLE VRF SYSTEM

YMGI's VRF Heat Pump systems are designed to deliver comfort year round. Effective in a wide range of outdoor ambient temperatures (as low as -4° F), the YMGI VRF Heat Pump systems can meet all your heating and cooling needs, with no need for a supplemental heating system. A YMGI VRF system can replace traditionally designed gas furnace and AC/HP coil & outdoor unit systems. VRF Heat Pump systems save money on installation and operation.


Model	Unit	VRFO-36HP-V2B(55)5
Cooling Capacity	Btu/h	36,000
EER	Ducted	11.30
	Mixed Ducted	12.15
	Non-Ducted	13.00
SEER	Ducted	16.50
	Mixed Ducted	18.50
	Non-Ducted	20.50
Heating Capacity	Btu/h	45,000
HSPF	Ducted	10.30
	Mixed Ducted	11.00
	Non-Ducted	11.70
Air flow volume	CFM	3531
Heating Capacities at Different OD Ambient Temperatures	47 ° F	100% / 45,000
	17 ° F	100% / 45,000
	-4 ° F	100% / 45,000
Sound Pressure Level	dB(A)	56
Power Supply	V/Ø/Hz	208~230/1/60
MCA	A	37
MOP	A	50
Connection Method	-	Flare/Nut
Refrigerant	-	R410A
Compressor Manufacturer	-	GR/LD
Compressor Type	-	Two-stage Variable Frequency Rotary
Compressor Quantity	No.	1
Motor Type	-	INVERTER
Fan Quantity	-	2
Capacity Adjustment Range	%~%	15%~120%
Maximum drive IDU NO.	unit	5
Max. Equivalent Connection Pipe Length	feet	360
Condenser Fin Color	-	Golden
Cooling Operation Ambient Temperature Range	° F	23° ~ 118°
Heating Operation Ambient Temperature Range	° F	-4° ~ 80.6°
Refrigerant Charge	oz	176.4
Low Ambient Cooling Function	-	YES
Base Pan Heater	-	YES




# Submittal Data Sheet: VRFO-36HP-V2B(55)5

## OUTDOOR UNIT


Dimensions (inches)	
	inches
A	35 3/8"
B	13 3/8"
C	53"
D	22 1/2"
E	14 7/8"

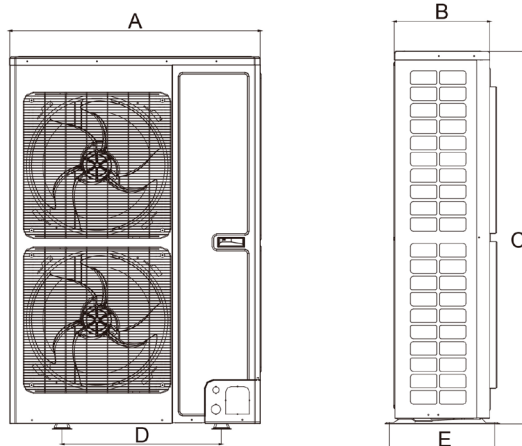


## SYSTEM LAYOUT

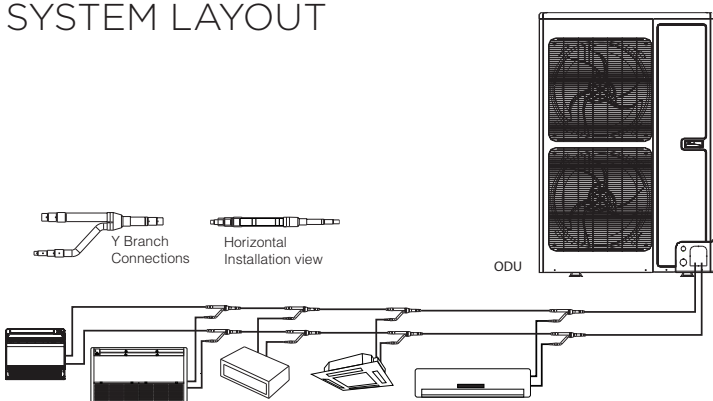

## CLEARANCES

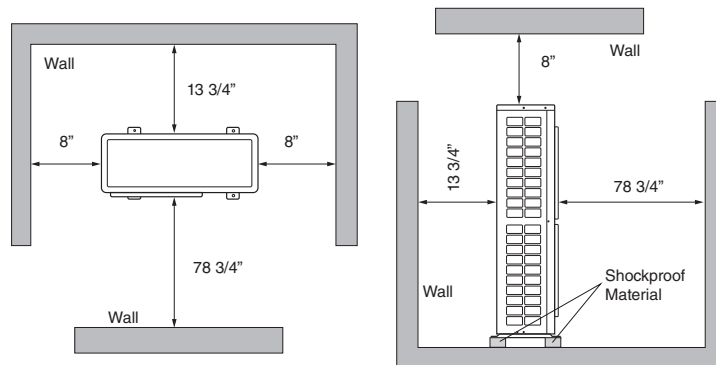

## WIRING

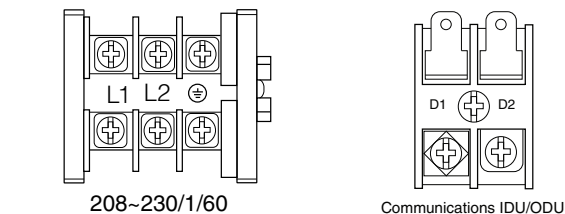

Total length (actual length) of fitting pipe	
Length of farthest fitting pipe	Actual length
	Equivalent length
From the 1st branch to the farthest indoor pipe	
Height difference between ODU and IDU	ODU at upper side
	ODU at lower side
Height difference between IDUs	

Mini VRF Systems		
Allowable value		
	m	f
	300	984
	120	394
	150	492
	40	131
	50	164
	40	131
	15	49

## FEATURES

- 208-230/1/60 power input
- Heats at 80% capacity down to -4 °F, cools down to 23 °F.
- Quiet and efficient heating & cooling.
- DC Inverter technology and auto AC/DC power management.
- Compact footprint with side discharge
- ODU ships pre-charged with environmentally friendly R410A refrigerant.
- All DC Inverter high quality compressors
- Sensorless DC fan motor
- Durable powder coated cabinet
- Built to ETL/UL/CSA/AHRI standards
- Easy installation and maintenance

## YMGI Group

601 Arrow Ln, O'Fallon, Missouri 63366  
 Phone: 1-866-833-3138  
 Fax: 1-866-377-3355  
 ymgigroup.com

Sales Representative or Distributor: