



Submittal Data Sheet: WMMS-18KS-V2B(56) M6



Job Name:		Tag #:	
Location		Date:	
General Contractor:		Mechanical Contractor:	
Sales Representative:		Sales Engineer:	
Submitted by:		Drawing #:	
Reference		PO #:	

YMGI's ductless 56 Series offers a quiet and efficient heating and cooling solution for any single room application with minimal impact to the environment. 56 Series units have a single zone mini split wall mounted unit and wall mount evaporator. The 56 Series can be wired directly to an array of solar panels (up to 5) to offset power consumption. The 56 Series create environmentally friendly comfortable living and working spaces. Includes U-Touch remote control.

ACCESSORIES

- ADVANCED HEALTHY KIT
HEPA/Enzyme/Cold Catalyst Filter
Anion Generator
- THERMOSTAT
- MOUNTING BRACKETS
- FOOT RISERS
- COPPER/WIRE/ACC.SET
- LINESET COVERS
- WINTER WIND BAFFLE
- BRIDGE CONTROLLER

Connection Pipes		
Outer Diameter Liquid Pipe	inches	1/4
Outer Diameter Gas Pipe	inches	1/2
Max Distance ID Above ODU	feet	50
Max Distance ID Below ODU	feet	60
Max Distance Length	feet	100

Dimensions & Weight Indoor Unit		
Dimensions-Net W x H x D	inches	39.8 x 15.0 x 11.2
Net / Gross Weight	lbs.	28.7 / 37.5

Dimensions & Weight Outdoor Unit		
Dimensions-Net W x H x D	inches	35.0 x 27.6 x 13.4
Net/Gross Weight	lbs.	110.1 / 121.1
Safety Certification		ETL (C & US)
Performance Certification		AHRI

Dimensions & Weight Solar Panel		
Dimension (W x H x D)	inches	64.6 x 39.1 x 1.6
Net/Gross Weight	lbs	37.0 / 52.9


		COOLING	HEATING
System Model		WMMS-18K-V2B(58)2	
Power Source		208~230 / 1 / 60	
Cooling	Btu/h(L/M/H)	6000/18000/22350	
Heating	Btu/h(L/M/H)	4100/21000/24000	
MCA	Amp	13.2	
Frequency (High / Medium / Low)	Hz	80 / 57 / 15	75 / 65 / 15
Power Input (High / Medium / Low)	W	1450 / 1000 / 120	1500 / 1200 / 220
Rated Current (High / Medium)	A	7.0 / 5.2	7.5 / 6.0
SEER / HSPF	Btu/h.w	UP to 32	9.8
EER/COP	Btu/h.w	15.1	4.1
Dehumidifying Volume	Pints/Hr.	2.5	
Outdoor Unit (ODU)	Model	WMMS-18CS-V2B(56)	
Compressor Type		Twin Rotary DC	
L.R.A.	A	41	
Compressor RLA	A	8.4	
Compressor Power Input	W	1640	
Overload Protector		1NT11L-3979	
Throttling Method		Electronic Expansion Valve	
HVAC Circuit Breaker	A	30	
Starting Method		Transducer starting	
Recommended Working Ambient Temp Range	°F	15°F ≤ T ≤ 115°F	5°F ≤ T ≤ 86°F
Condenser Coil Type		Aluminum fin-copper tube	
Fan Motor Speed (rpm) (H/L)		690 / 500	
Output of Fan Motor	W	60	
Fan Motor RLA	A	0.62	
Fan Motor Capacitor	uF	3	
Air Flow Volume of Outdoor Unit	CFM	1890	
Defrosting Type		Auto defrost	
Isolation		I	
Moisture Protection		IP24	
MAX. Operating Pressure for Discharge Side	PSIG	551	
MAX. Operating Pressure for Suction Side	PSIG	174	
Sound Pressure Level (H/M/L)	dBA	54	
Sound Power Level dB (H/M/L)	dBA	64	
Indoor Unit (IDU)	Model	WMMS-18ES-V2B(56)	
Fan Motor Speed (SH/H/M/L)	RPM	1350 / 1200 / 1050 / 900	1420 / 1250 / 1150 / 1050
Air Flow Volume (SH/H/M/L)	CFM	500 / 460 / 383 / 324	
Output of Fan Motor	w	20	
Fan Motor RLA	A	0.25	
Evaporator Coil	Type	Aluminum fin-copper tube	
Output of Swing Motor	W	2.4	
Fuse	A	PCB 3.15A Transformer 0.2A	
Sound Pressure Level (SH/H/M/L)	dBA	40 / 36 / 32 / 26	
Sound Power Level (SH/H/M/L)	dBA	50 / 46 / 42 / 36	
Solar Panel	Model	WMMS-18PS-V2B(56)	
Municipal Power Consumption, With No Solar Panels Installed			
Power Supply	V/Ph/Hz	208-230/1/60	
Power Input	W(L/S/H)	300/1500/2500	335/1600/2550
Municipal Power Consumption, with Solar Panel Installed / tested at STC Solar Irradiance of 1000 W/m2			
Power Input	W (L/S/H)	30 / 400 / 650	30 / 500 / 700
Accepted Solar Panel - Power Data Ranges (All Panel of Same Model & Type)			
Open Circuit VoltageVoc (All PV Panels in Series)	V	22~165	
Short Circuit Current Isc (Per Panel)	A	5~9	
Nominal Power Output (STC Condition) Pmax (Per Panel)	W	200 + (to 400)	
Power Output Tolerances (Per Panel)	W	-0 / +3 to +5	
Allowed PV Panel	W	Mono-crystalline or Poly-silicon	
Allowed PV Panel Qty. in Series	Pieces	1 to 5 (up to 1000 W)	
Recommended PV Panel Qty.			
Southern CA-FL / Northern CA, NC / OR-NY / WA-NE		2-4 / 3-5 / 4-5 / 5	



Submittal Data Sheet: WMMS-18KS-V2B(56) M6


OUTDOOR UNIT

Dimensions (inches)	
W	30"
W1	33 13/32"
W2	21 5/16"
H	21 5/16"
D	10 3/32"
D1	12 19/32"
D2	11 5/16"

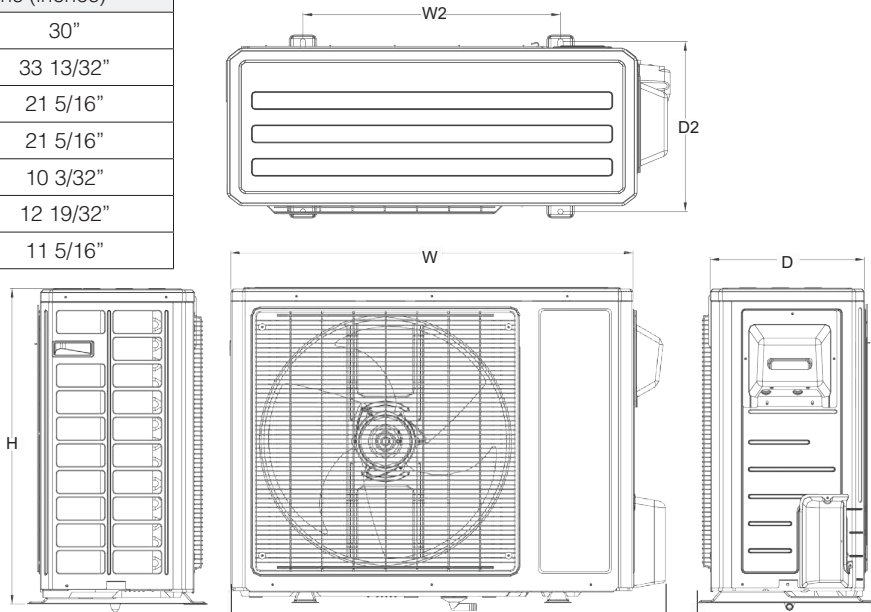


SOLAR PANEL

Dimensions (inches)	
L	64 19/32"
W	39 3/32"
D	1 19/32"

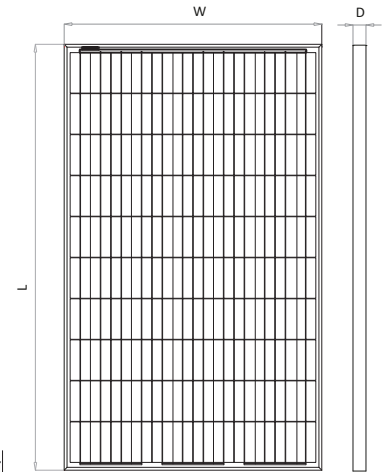


INDOOR UNIT


Dimensions (inches)	
W	33 5/16"
H	10 13/16"
D	7 3/32"

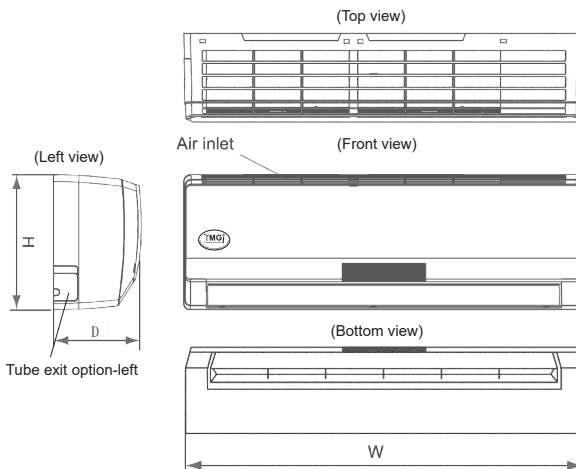

TERMINAL BLOCK

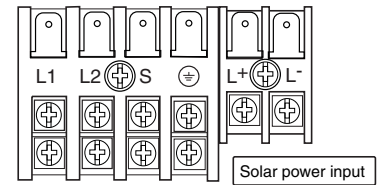

MOUNTING PLATE

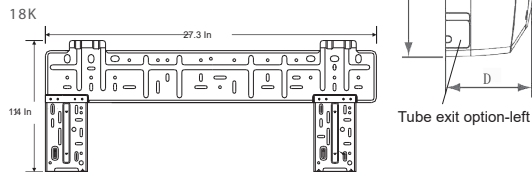

FEATURES

- Minimized municipal power usage. As low as 30W.
- PV panel DC power, supplemented by municipal power. (Municipal electricity is required for stable power source.)
- Advanced temperature, comfort and safety control
- Can be integrated to work with existing solar panels
- R410A refrigerant and constructed from environment friendly materials.
- Solar panel installations eligible for Federal tax credit and/or State and/or utility company's rebate/incentive programs
- Quiet and efficient heating & cooling
- LED display shows set temperature & operating modes
- Motorized louver system quietly distributes air evenly
- "U-TOUCH" Remote Control
- DC Inverter technology
- Wide working ambient temperature ranges
- Stylish system design
- Compact outdoor unit with side discharge
- Outdoor unit ships pre-charged.
- High quality compressors
- Durable powder coated cabinet
- Default flare brass connection valves
- Knock-outs for refrigerant pipes and wiring
- Built to ETL/UL/CSA/ARI standards
- Easy installation and maintenance

YMGI Group
 601 Arrow Ln, O'Fallon, Missouri 63366
 Phone: 1-866-833-3138
 Fax: 1-866-377-3355
 ymgigroup.com

Sales Representative or Distributor: