



## Submittal Data Sheet: WMMS-36K-V2B(57)3 M1

### INDOOR UNIT



**WMMS-36E-V2B(57)3**

### OUTDOOR UNIT



**WMMS-36C-V2B(57)3**

### ACCESSORIES

- THERMOSTAT
- MOUNTING BRACKETS
- FOOT RISERS
- COPPER/WIRE/ACC.SET
- LINESET COVERS
- WINTER WIND BAFFLE
- BRIDGE CONTROLLER

System Model Number		WMMS-36K-V2B(57)3	
<b>Connection Pipes</b>			
Length without Adjusting Refrigerant	ft.	25	
Refrigerant Charge	oz	116.48	
Outer Diameter Liquid Pipe	in	3/8"	
Outer Diameter Gas Pipe	in	5/8"	
Max. Allowed ID-OD Elevation Difference	ft.	16.4	
Max. refrigerant pipe length	ft.	49.2	

Dimensions & Weight Indoor Unit		
Dimension (W x D x H)	Inch	57 3/8" x 11 1/8" x 13 5/8"
Packing (W x D x H)	Inch	63" x 17" x 14"
Net/Gross Weight	lbs.	53/60

Dimensions & Weight Outdoor Unit		
Dimension (W x D x H)	Inch	38" x 15" x 31"
Packing (W x D x H)	Inch	44" x 19" x 35"
Net/Gross Weight	lbs.	152/163

Job Name:		Tag #:	
Location		Date:	
General Contractor:		Mechanical Contractor:	
Sales Representative:		Sales Engineer:	
Submitted by:		Drawing #:	
Reference		PO #:	


YMGI's ductless SOLO single zone mini split wall mounted unit uses the most popular evaporator style, and offers a quiet and efficient heating and cooling solution or any single room application. The has a simplified display that shows mode and temperature, and a motorized louver system that evenly distributes air throughout the room. The SOLO 57's ODU is designed for ground installation, or mounting onto a wall, under a deck or on a balcony.

System Model Number		WMMS-36K-V2B(57)3	
Indoor Unit		WMMS-36E-V2B(57)3	
Outdoor Unit		WMMS-36C-V2B(57)3	
Power supply		V/Ph/Hz	208-230V/1/60Hz
Cooling	Nominal Capacity	Btu/h	32000
	Input	W	3600
	Rated current	Amp.	15.6
	EER	Btu/h.w	8.7
	SEER	Btu/h.w	16.0
Heating	Capacity	Btu/h	33000
	Input	W	3110
	Rated current	Amp.	13.5
	COP	W/W	3.10
	HSPF4	Btu/h.w	9.5
	HSPF5	Btu/h.w	8
MINIMUM CIRCUIT AMPACITY		Amp.	21
MAX HVAC Type Circuit Breaker		Amp.	30
Compressor	Model	ATL253UDPC9AU	
	Type	Rotary	
	Brand	HIGHLY	
	Capacity	Btu/h	24430
	Input	W	2240
	Rated current(RLA)	Amp.	9.4
Refrigerant oil / oil charge		ml	HAF68D1C or equivalent / 830±20ml
Indoor fan motor	Model	YDK-50C-4P 6	
	Brand	CHIGO	
	Input	W	99
	RLA	Amp.	0.49
	LRA	Amp.	0.77
	Winding Resistance	Ω	86.9/87.3
Capacitor	uF	2.5	
Speed(Hi/Mi/Lo)	r/min	1350	
Indoor air flow (Hi/Mi/Lo)		CFM	833
Indoor noise level (Hi/Mi/Lo)		dB(A)	53
Outdoor fan motor	Model	MDR-9538-910A	
	Brand	XN	
	Input	W	100
	RLA	Amp.	/
	LRA	Amp.	/
	Winding Resistance	Ω	/
Capacitor	uF	/	
Speed	Rpm/M	790	
Outdoor air flow		CFM	2262
Outdoor noise level		dB(A)	58
Refrigerant type		Oz	31.68
Refrigerant precharge		Ft.	---
Additional charge for each ft		Oz	---
Design pressure		PSIG	510/250
Connection wires between IDU and ODU			4xAWG18
Control Type			Remote Control
Operation Temperature Ranges	Indoor(cooling/ heating)	°F	61°F ~90°F
	Outdoor(cooling/heating)	°F	15°F~115°F / -4°F~-75°F
Application area (cooling standard)		sq.ft.	463~721




### OUTDOOR UNIT

Dimensions (inches)	
W	38"
H	31"
D	15"
W2	27.83"
D2	15.47"


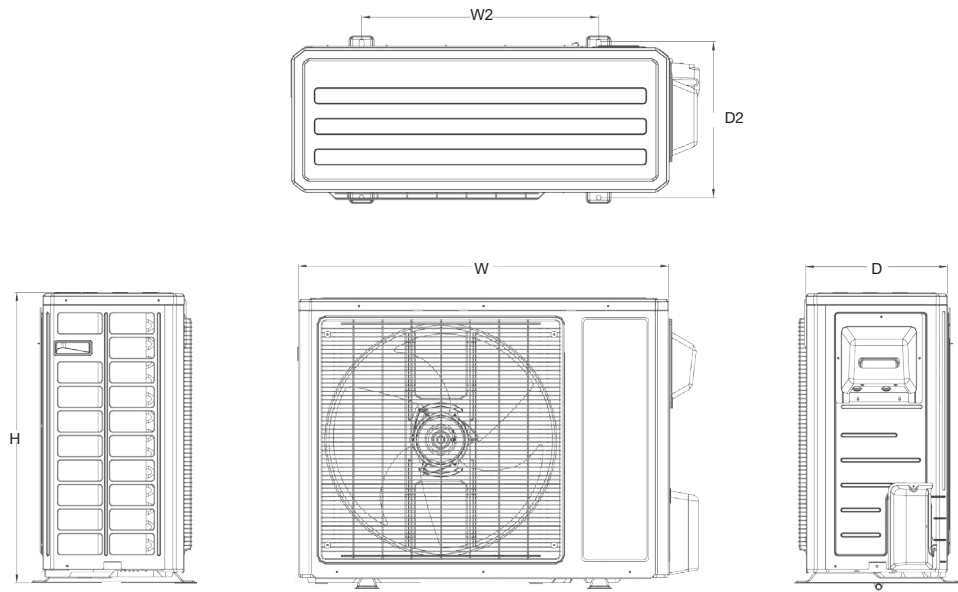


### INDOOR UNIT


Dimensions (inches)	
W	57 3/8"
H	13 5/8"
D	11 1/8"

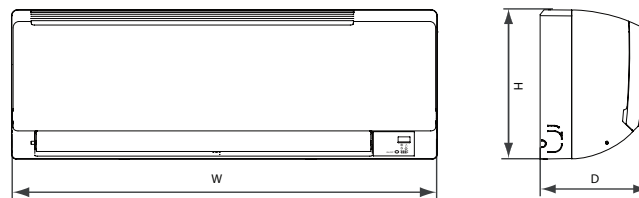

### MOUNTING PLATE

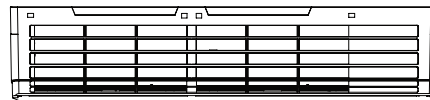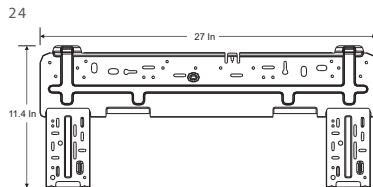

### TERMINAL BLOCK

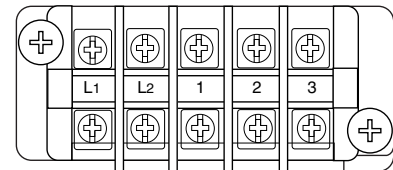

### FEATURES

- 208-230/1/60 power input
- Quiet and efficient heating & cooling.
- LED display shows set temperature & operating modes.
- Motorized louver system quietly distributes air evenly
- Remote Control.
- DC Inverter technology
- Wide working ambient temperature ranges
- Stylish design
- Compact outdoor unit with side discharge
- Outdoor unit ships pre-charged.
- World-class quality compressors
- Durable powder coated cabinet
- Default flare brass connection valves
- Knock-outs for refrigerant pipes and wiring
- Built to ETL/UL/CSA/ARI standards
- Easy installation and maintenance

**YMGI Group**  
 601 Arrow Ln, O'Fallon, Missouri 63366  
 Phone: 1-866-833-3138  
 Fax: 1-866-377-3355  
 ymgigroup.com

Sales Representative or Distributor: