



## Submittal Data Sheet: VRUI-48UC-M2B(54)

### INDOOR UNIT



VRUI-48UC-M2B(54)

### IDU Works with all Major Brand Heat Pumps

Works with Any Thermostat



YMGI



Honeywell  
and more!



Nest

### ACCESSORIES

☐ COPPER/WIRE/ACC.SET

Model		VRUI-48UC-M2B(54)	
Dimensions			
Outline dimension (WxDxH)		in.	24 13/16" × 21 1/4" × 57"
Package dimension (LxWxH)		in.	27 9/32" × 26" × 59 3/8"
Outer Diameter	Liquid Pipe	in.	3/8"
	Gas Pipe	in.	3/4"
Weight			
Net Weight		lbs.	202.83
Gross Weight		lbs.	218.26

Job Name:		Tag #:	
Location		Date:	
General Contractor:		Mechanical Contractor:	
Sales Representative:		Sales Engineer:	
Submitted by:		Drawing #:	
Reference		PO #:	

#### Perfect for New Construction and Retrofits

Designed to replace existing air handlers. Easily adapts to your existing duct work. Great for new installations where ductwork is preferred. All electric heat pump replaces gas furnaces and AC coils to save energy and lower operation costs.

#### Install Horizontally or Vertically

UC Unit can be installed in a vertically or horizontally, giving you the flexibility to install according to your desire or need. Horizontal mounting is a great solution for installations with minimum space, like attics or crawlspaces.

#### Multiple Protections

Anti-freezing, temperature sensor malfunction, and fan motor overload protection.


Parameter(Unit)			VRUI-48UC-M2B(54)	
Type			Airhandler	
Electrical Data	Power supply	V-Hz-Ph	208/230-60-1	
	Power input <sup>1</sup>	Cooling	kW	0.31
		Heating	kW	0.31
	Input current <sup>1</sup>	Cooling	A	2.22
		Heating	A	2.22
	Max. Overcurrent Protection	A	15	
	Min/Max Voltage	Min/Max Voltage (V)	V	187/253
	Power cord spec	Electrical Conduit Size (Inch)	mm <sup>2</sup> xpcs	/
Fuse (A)			A	
Sound Pressure Level (SS/H/M/L)*		dB (A)	50	
Sound Power Level (SS/H/M/L)*		dB (A)	60	
Refrigerant	Type	-	R410A	
	Control	-	Thermal expansion valve	
Air Flow Volume(rated EXP)		CFM	1470	
External Static Pressure	Rated	Pa	50	
		InWg	0.2	
	Range	Pa	0~100	
		InWg	0~0.4	
Fan Motor	Model	-	FGZ750B	
	Drive Type	-	Direct drive	
	Speed	rpm	850	
	Power Output	W	1	
	Full Load Amp(FLA)	A	3.20	
	Capacitor	uF	/	
Fan	Quantity / Type	1 / Centrifugal		
	Diameter-Height	in.	Ø10 7/8" - 11 1/4"	
Evaporator	Material	-	Inner groove copper tube- Aluminum fin	
	Face Area	sq.ft	5.49	
		m <sup>2</sup>	0.51	
	Pipe Diameter	in.	Ø3/8	
	Number of rows	4		
	Tube pitch(a)x row pitch(b)	in.	1" × 7/8"	
	Fins per Inch(FPI) / Fin type	14 / Hydrophilic-window		
Number of circuits	12			
Length(L) × Height(H) × Width(W)		in.	16 11/32" × 3 15/32" × 24"	
Operation temp	Cooling	°F	64.4°F ~80.6°F	
	Heating	°F	68°F ~80.6°F	
Drainage Connection Size (Outer Diameter×Wall Thickness)		mm	Ø1" × 1/16"	
System Operation Control		Wired controller		






# Submission Data Sheet: VRUI-48UC-M2B(54)

## INDOOR UNIT

Dimensions (inches)	
W	24 13/16"
H	57"
D	21 1/4"
A	11 5/8"
B	20"

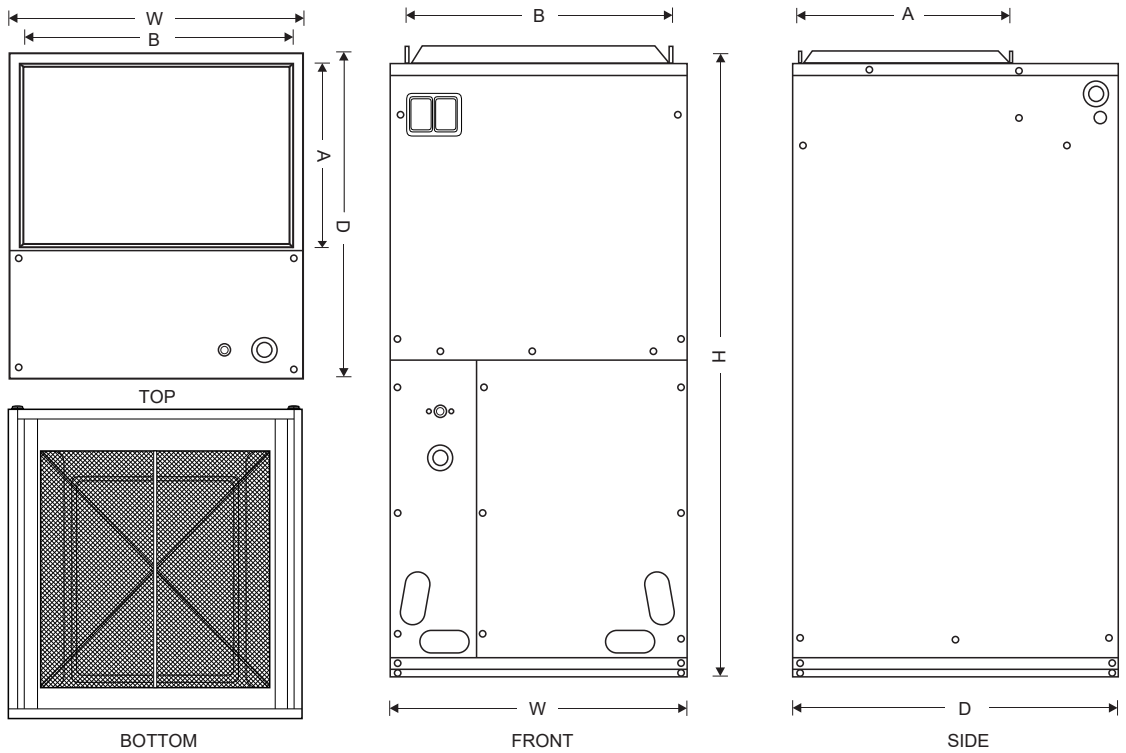

## WIRING

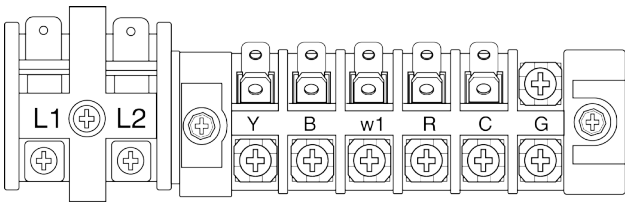

## FEATURES

- 208-230/1/60 power input
- Quiet and efficient heating & cooling.
- Durable powder coated cabinet
- Standard braze connections
- Knock-outs for refrigerant pipes and wires
- Built to ETL/UL/CSA/AHRI standards
- Easy installation and maintenance

- 4 Operating modes: Cooling, Heating, Fan and Auto
- DC Inverter technology saves energy
- Memory stores set temperature and operating modes
- Can run at medium and low static pressure
- Optional ambient temperature sensor
- Built-in electronic expansion valve
- 5 Year Warranty on parts

**YMGI Group**  
 601 Arrow Ln, O'Fallon, Missouri 63366  
 Phone: 1-866-833-3138  
 Fax: 1-866-377-3355  
 ymgigroup.com  
 sales@ymgigroup.com

Sales Representative or Distributor: