



Submittal Data Sheet: VRFI-09EC1-D2B(55)5

INDOOR UNIT



VRFI-09EC1-D2B(55)5

ACCESSORIES

- REPLACEMENT FILTERS
- BRIDGE CONTROLLER

Model		VRFI-09EC1-D2B(55)5
Connection Pipes		
Liquid Connecting Pipe Diameter	in.	Ø1/4
Gas Connecting Pipe Diameter	in.	Ø3/8
Drain Pipe External Diameter	in.	Ø1
Drain Pipe Internal Diameter	in.	Ø13/16
Dimensions & Weight Indoor Unit		
Main Body (W x D x H)	in.	38 7/8" x 15 1/8" x 8 1/8"
Net Weight	lbs.	53 lbs
Decorative Panel		
Decorative Panel (W x D x H)	in.	47 1/4" x 17 15/16" x 2 1/2"

Job Name:		Tag #:	
Location		Date:	
General Contractor:		Mechanical Contractor:	
Sales Representative:		Sales Engineer:	
Submitted by:		Drawing #:	
Reference		PO #:	

Ceiling Mount 1 Way Cassette EC Unit

The EC indoor unit is the perfect solution for large open rooms that are more than 25' long or wide. YMGI's Ceiling Mount Cassette Units allow for easy installation into the 24" joist space and flush mount to the ceiling. Standard remote or wall mounted thermostats are available. Each unit has a Remote Control and a Wall Controller with an LED display that shows unit set temperature and mode settings as well as technician information.

DC Inverter Motor

Efficiency is improved by 30% over standard PSC motors.

Ultra-Low Noise Operation

Stepless speed regulation and scientifically optimized fan wheel design enable quiet operation.

Intelligent Drainage Device

Built-in water lift condensate pump and overflow protection.

Protection Function

Water overflow, anti-freezing, temperature sensor malfunction, and fan motor overload protection.

Strong and Balanced Airflow

1-way airflow, variable fan speeds ensure consistent and comfortable circulation.

Beautiful Appearance

It's simple and elegant front panel design works well in any room.

Thermostat Controller




By using a YMGI bridge controller, North American style thermostats (Nest, Honeywell, Pro1, YMGI etc.) can be used for temperature control, locally or remotely, individually or in groups.

Model		VRFI-09EC1-D2B(55)5
Power Supply	V / Ph / Hz	208~230 / 1 / 60
Cooling Capacity	Btu/h	9554
Heating Capacity	Btu/h	10918
Air Flow (Low/Medium/High)	CFM	265 / 294 / 353
Sound Pressure Level (L/M/H)	dB	36 / 32 / 28
Fan Motor Power Output	W	30
Fan Motor Running Current	F.L.A.	0.2
Rated Input	W	55
Refrigerant		R410A




INDOOR UNIT


Dimensions (inches)	
A	38 7/8"
B	40 1/2"
C	43 7/8"
D	47 1/4"
E	15 1/8"
F	16 3/8"
G	17 15/16"
H	10 1/4"
I	8 1/8"

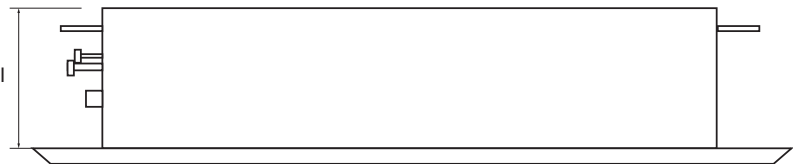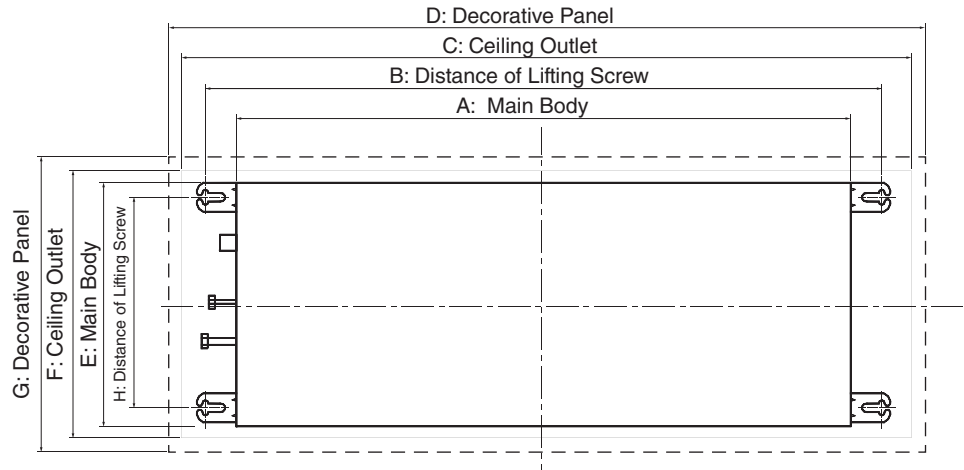

WIRING




Power Supply
L1 L2
208/230/1/60



IDU/ODU Communication
D1 D2
Wired Controller
H1 H2
Local
Can be jumped between IDUs

CLEARANCE

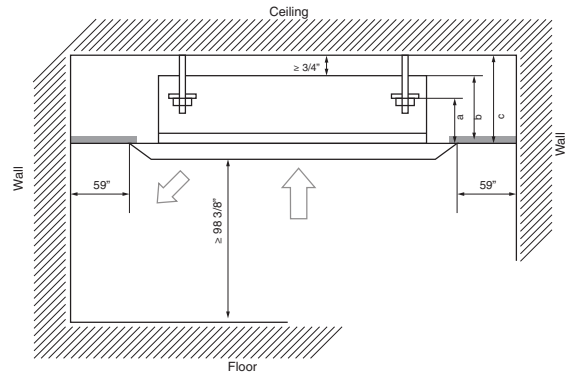

FEATURES

- 208-230/1/60 power input
- Quiet and efficient heating & cooling.
- DC Inverter technology
- Wide working ambient temperature ranges
- Built in protection functions
- Washable filter
- Unit ships pre-charged with dry nitrogen
- Stylish design
- Standard flare nut connection valves
- Built to ETL/UL/CSA/AHRI standards
- Easy installation and convenient maintenance

YMGI Group
601 Arrow Ln, O'Fallon, Missouri 63366
Phone: 1-866-833-3138
Fax: 1-866-377-3355
ymgigroup.com
sales@ymgigroup.com

Sales Representative or Distributor: